

1074 GUIDE


I/12.8V/14V/2.73A/0.51A/P15D30/RP11/CL

bulb specifications:


category:	Incandescent-miniature lamp
volt:	12.8 / 14
amp:	2.73 / 0.51
watt:	34.9 / 7.14
base:	P15d30 - Double Contact Prefocus Flanged also known as Double Contact Prefocus Bayonet also known as P15d (Europe) also known as P30d (USA)
glass:	RP11
filament:	C2R or C6
fil.res.:	4.69 / 27.5 ohm
m.o.l.:	2.25 inch (57.2MM)
l.c.l.:	0.88 inch (22.4MM)
i.lumens:	101
cp:	8
d.hours:	240 / 2000
notes:	automobile lamp

clear glass
headlight lamp
slotted
specs verified against ANSI-SR25D1997


uses socket: DB-P15D30-1

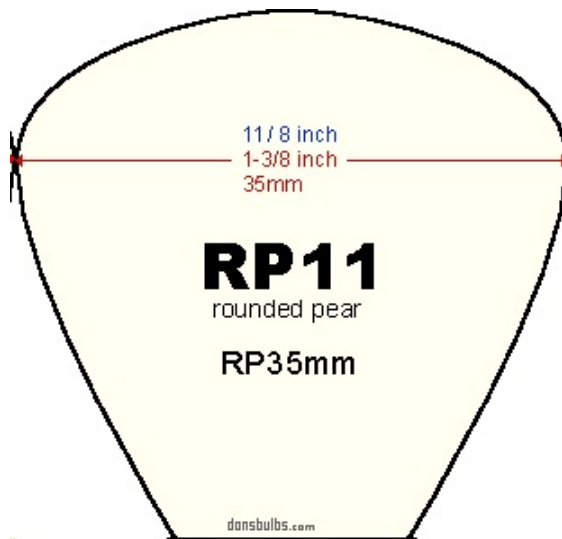

typical shape of RP11 glass envelopes

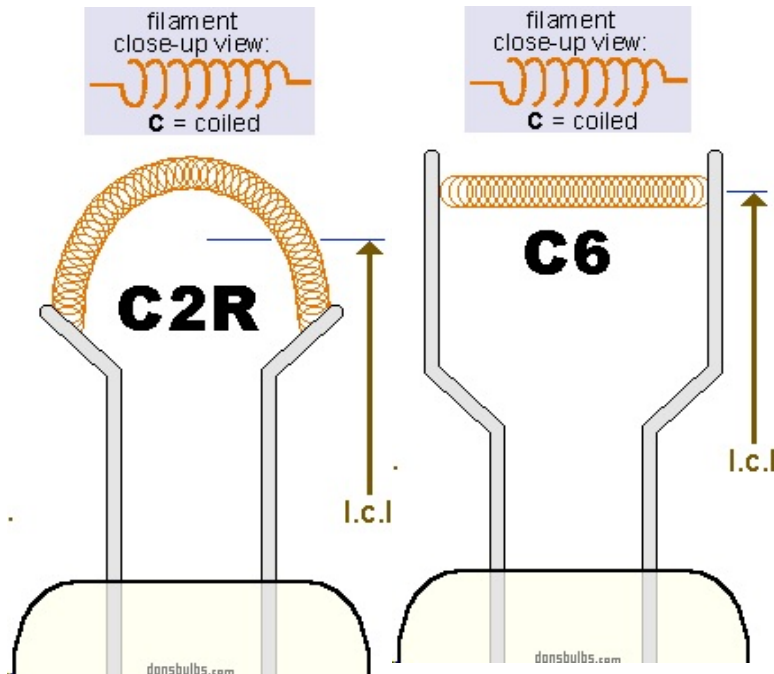

Filament could be either C2R or C6: typical shape of C2R or C6 filament
or: typical shape of C2R or C6 filament

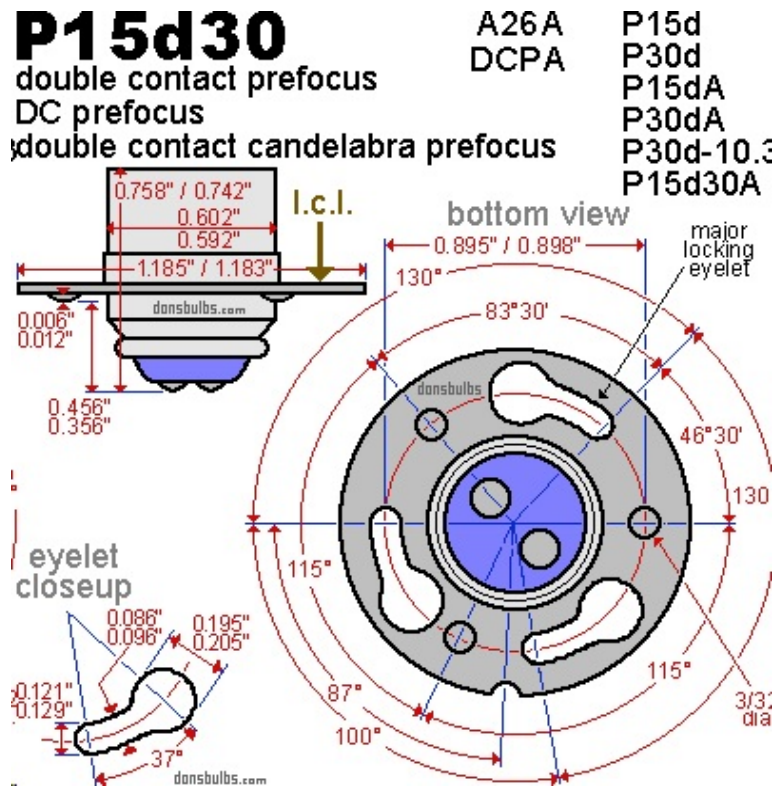

Industry standards for base: P15d30 - Double Contact Prefocus Flanged also known as Double Contact Prefocus Bayonet also known as P15d (Europe) also known as P30d (USA)