

1076 AC DELCO

1076 USA

I/12.8V/23W/BA15D/S8/CL/200H

bulb specifications:

category: Incandescent - Miniature Lamp

volt: 12.8

amp: 1.8

watt: 23

base: BA15d - Double Contact Candelabra Bayonet (or D.C.Bayonet)

glass: S8

filament: C6

fil.res.: 7.11 ohm

m.o.l.: 2 inch (50.8MM)

l.c.l.: 1.25 inch (31.8MM)

i.lumens: 402

cp: 32

d.hours: 200

notes:

automobile lamp

clear glass

flashing signal lamp

incandescent lamp


specs verified against ANSI-SR25D1997

stop light lamp


uses sockets:

DB-BA15D1


DB-BA15D8

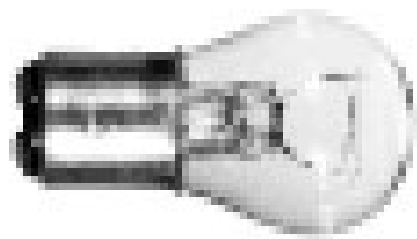

typical photo of 1076 USA I/12.8V/23W/BA15D/S8/CL/200H bulb type
(your bulb may look slightly different)

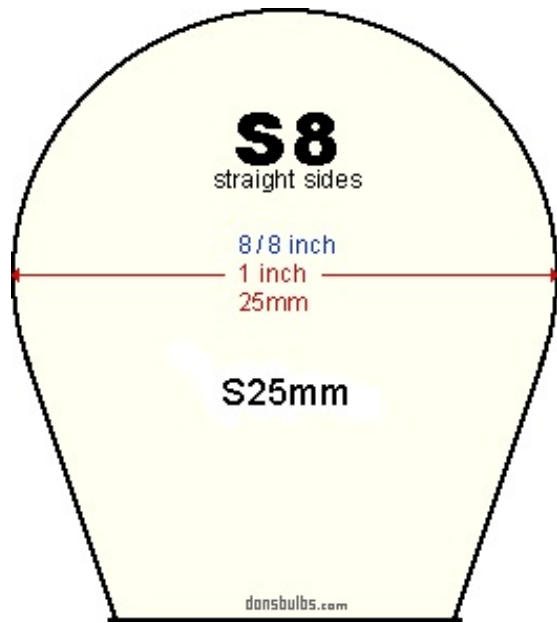

typical shape of S8 glass envelopes (not to scale)

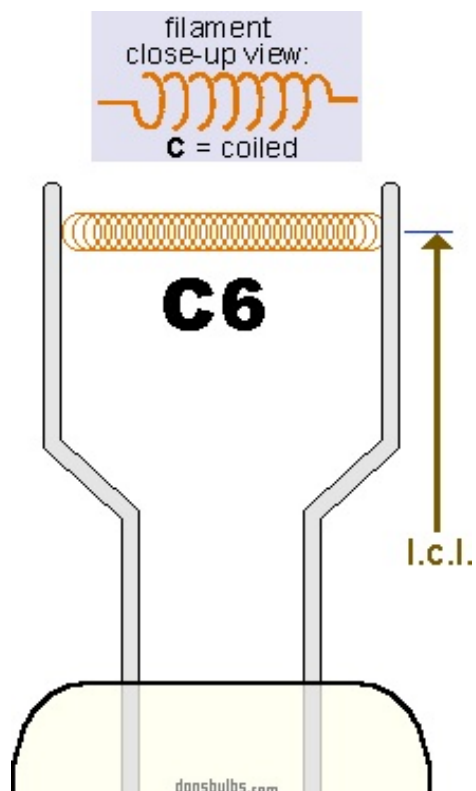

typical shape of C6 filament (not to scale)

BA15d

double contact bayonet

DC bayonet



double contact candelabra bayonet

SBC (British small bayonet cap)

IEC7004-11
DIN49721

IEC7005-13
DIN49642T6

A19A
A19B
A19C
A19D
B15d
SBC
DC
BD

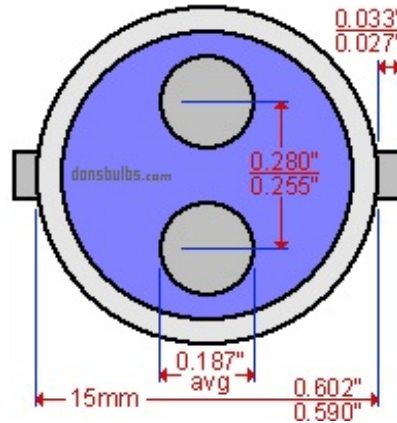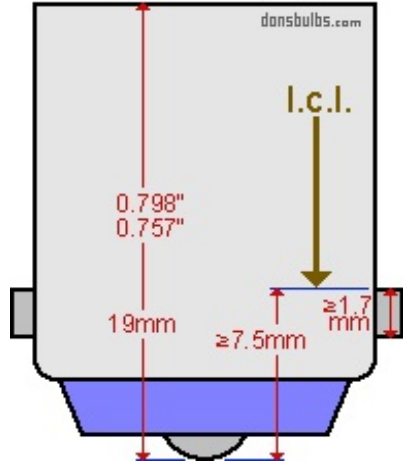

industry standards for base:
BA15d - Double Contact
Candelabra Bayonet (or
D.C.Bayonet)
(not to scale)