

1209-USA

1209-USA bulb specifications:

category: **Miniature**

volt: **6.1**

amp: **4.1**

watt: **25**

base: **P15s30** - Single Contact Prefocus Flanged

also known as Single Contact Prefocus Bayonet

also known as **P15s** (Europe)

also known as **P30s** (USA)

glass: **RP11**

filament: **C6**

fil.res.: **1.49** ohm

m.o.l.: **2.25** inches

l.c.l.: **.875** inches

i.lumens: **32**

cp: **2.5**

d.hours: **125**

notes: Instrument Lamp

uses socket: [DB-P15S30-1](#)

1209-USA

also known as **Cross-Reference:**

1209-USA

1209

1209-GE

1209-SUNRAY

1209GE

6.1-025-64B

8000058

8000058-USHIO

GE1209


MB-12090

MB12090


SM-1209

SM-1209-USHIO

SM1209

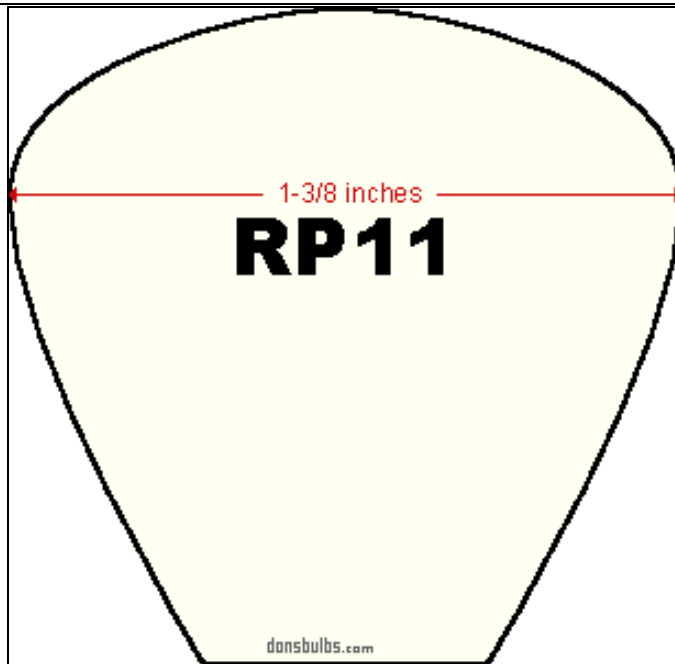

usual shape of **RP11** glass envelopes (not to scale)

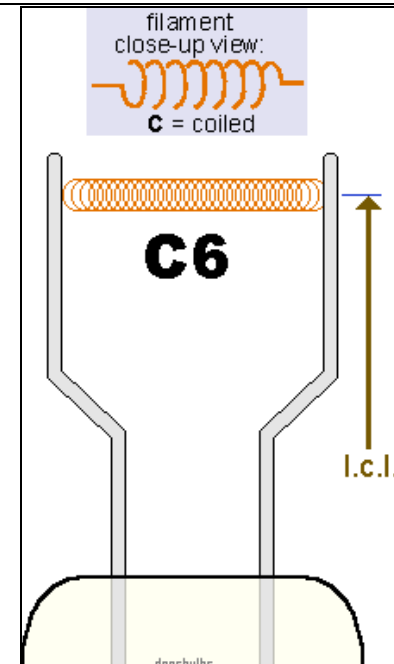

typical shape of **C6** filament (not to scale)

P15s30


single contact prefocuse

SC prefocus

single contact candelabra prefocus

A25
SCP

P15s
P30s
P30s-10.3
P30sb

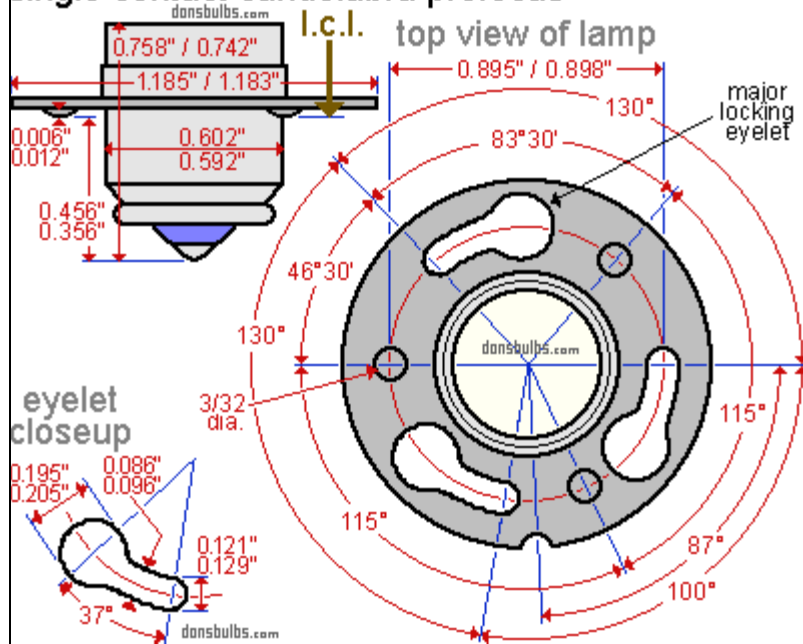

industry standards for base: P15s30 - Single Contact Prefocus Flanged
also known as Single Contact Prefocus Bayonet
also known as P15s (Europe)
also known as P30s (USA)
(not to scale)