

Sealed beam light bulb lamp 4416 USA

is known as:

4416 12.8V 30W USA

(4416/12.8V/30W USA)

4416 12.8V 30W USA bulb
specifications:

category: Sealed Beam

volt: 12.8

amp: 2.34

watt: 30

base: ST2

glass: PAR36

filament: C6

fil.res.: 5.47 ohm

m.o.l.: 2.76 inch (70MM)

burn pos: burn lamp in Base DOWN to HORIZONTAL position

d.hours: 300

notes:

35000AIPBCP

ba:11x4

LENS: CLEAR

MSP: 41MM

verified against ANSI-SR26D2002

medium angle spot lamp, signal lamp,
aircraft lamp, automobile lamp, emergency
building lighting, emergency vehical lamp

FOR 6 VOLT USE: 4516 USA

4416 12.8V 30W USA



also known as

Cross-Reference:


20-3626 GENERAL-ELECTRIC
4416/12.8V/30W USA
4416/12.8V/30W USA
4416/PAR36 SATCO
4416 AC/DELCO
4416 BULB-DIRECT
4416 EIKO
4416 GENERAL-ELECTRIC
4416 USA
4416 WESTINGHOUSE
6240-00-578-6763
21560-8
22983 GENERAL-ELECTRIC
455252 GENERAL-MOTORS
644209G MICROLAMP
1547133 GENERAL-MOTORS
031293460363 EIKO
I/12.8V/30W/ST/PAR36/SP/300
H
L4416 AC/DELCO
RP36S44.16 BAILEY
S4316 SATCO




typical photo of 4416 12.8V 30W USA bulb type
(your bulb may look slightly different)

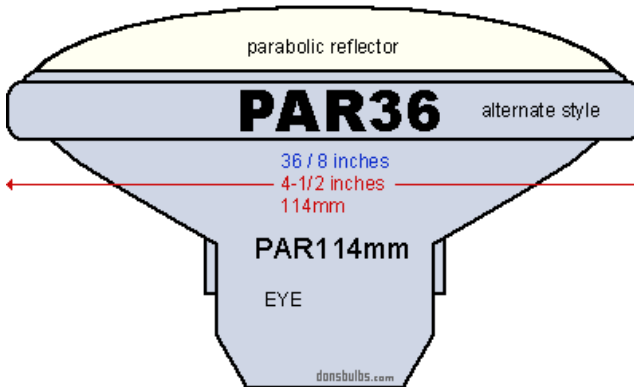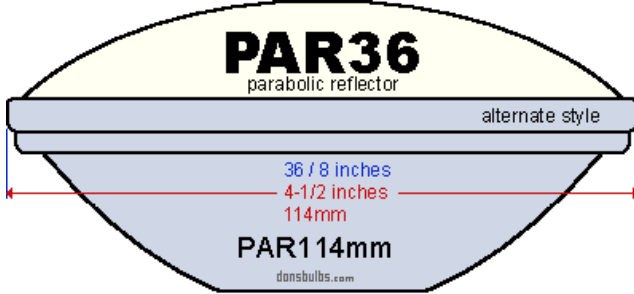

typical shape of PAR36 glass envelopes
(not to scale)

filament
close-up view:

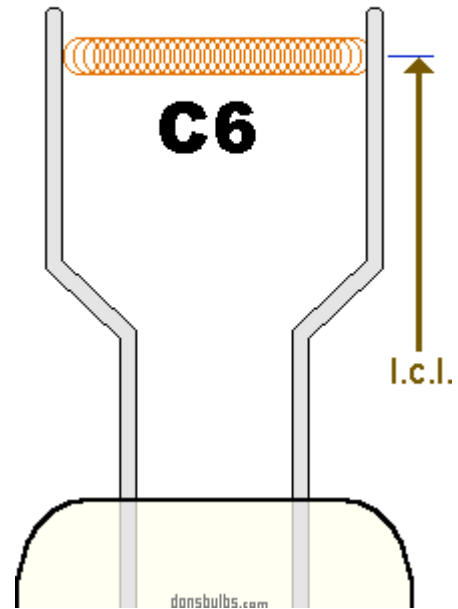C = coiled



typical shape of C6 filament
(not to scale)