

4516 GENERAL-ELECTRIC

is known as:

4516 6.2V 30W ST USA (4516/6.2V/30W/ST USA)

4516 6.2V 30W ST USA bulb

specifications:

category: **Sealed Beam**

volt: **6.2**

amp: **4.84**

watt: **30**

base: **ST2**

glass: **PAR36**

filament: **C6**

fil.res.: **1.28** ohm

m.o.l.: **2.76** inch (70MM)

d.hours: **300**

notes:

40000AIPBCP

FOR 12 VOLT USE: **4416 USA**

MSP: 41mm

automobile lamp

ba: 9x4

medium angle spot lamp

lens: clear

specs verified against ANSI-SR26D2002

spot lamp

**4516 6.2V 30W ST
USA**

also known as

Cross-Reference:

4516/6.2V/30W/PAR36/PHILIPS
MICROLAMP

4516/6.2V/30W/PAR36
MICROLAMP

4516/6.2V/30W/ST USA

4516/6.2V/30W USA

4516/PAR36 SATCO

4516 AC/DELCO

4516 GENERAL-ELECTRIC

4516 MICROLAMP

4516 STANDARDPRO

4516 USA

4516 WESTINGHOUSE

11342 STANDARDPRO

21467-6

24678-SKU GENERAL-ELECTRIC

24678 GENERAL-ELECTRIC

451927 GENERAL-MOTORS

43168962544

43168962544UPC

STANDARDPRO



I/6V/30W/ST/PAR36/NSP

I/6.2V/30W/ST/PAR36/SP/300H


L4516 AC/DELCO

S4323 SATCO

S4516 STANDARDPRO

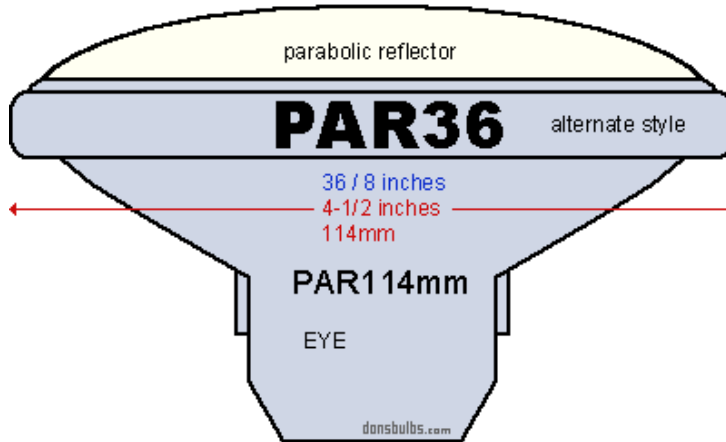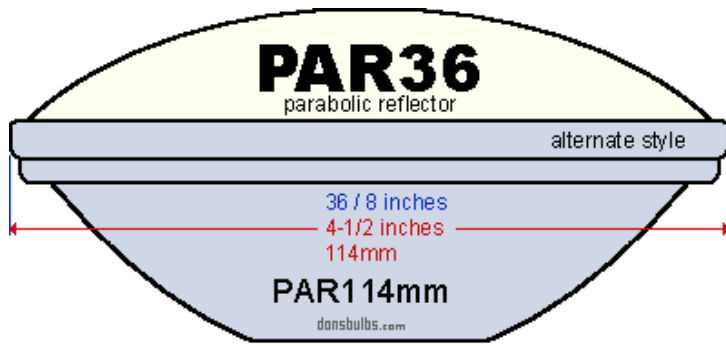


typical shape of PAR36 glass envelopes
(not to scale)

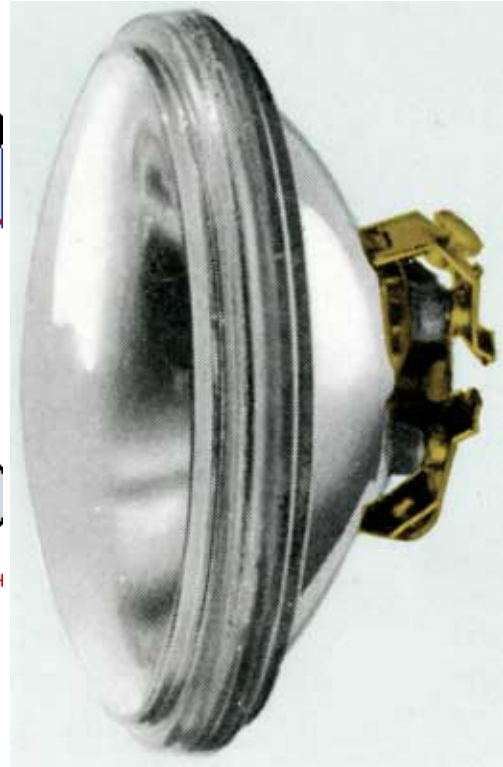

typical photo of 4516 6.2V 30W ST
USA bulb type (your bulb may look
slightly different)


ST2
2 screw terminals
two screw terminals

A40

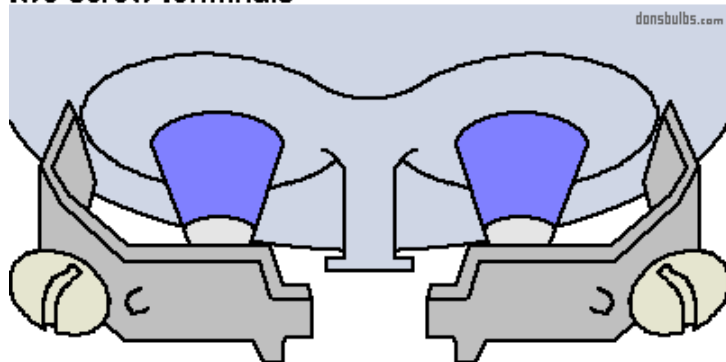

industry standards for base:
ST2 (not to scale)

filament
close-up view:
C = coiled

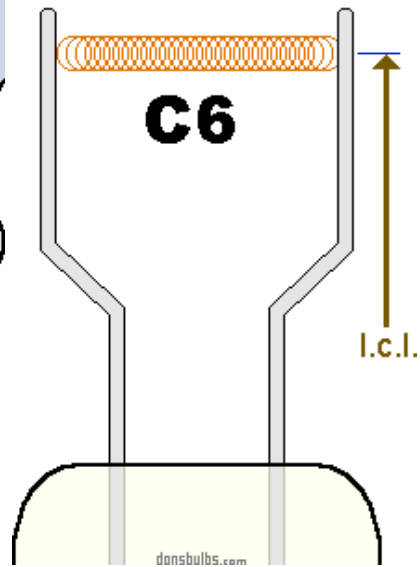

typical shape of C6 filament (not to
scale)