

6006 AC DELCO sealed beam light bulb lamp(6006 AC/DELCO)

6006 6.1V 6.2V 50W 40W USA bulb

specifications: category: **Sealed Beam**

volt: **6.1 / 6.2**

amp: **8.2 / 6.45**

watt: **50 / 40**

base: G16t

glass: **PAR56**

filament: **C6/C6**

fil.res.: **0.744 / 0.961** ohm

m.o.l.: **5.28** inch (134MM)

d.hours: **300 / 500**

notes:

AIMER BUTTONS ON LENS

ANSI spec sheet also refers to SAE-J1383

MSP:89mm

automobile lamp

headlight lamp

lens:fluted

military lamp

shielded filament

verified against ANSI-SR26D2002

6006 6.1V 6.2V 50W 40W

USA

also known as

Cross-Reference:

6006/6.1/6.2V/50/40W/PAR56/3-
CONTACT-LUGS MICROLAMP

6006/6.1V/6.2V/50W

6006/6.1V/6.2V/50W/40W/PAR56/3-
CONTACT-LUGS

6006/6.1V/6.2V/50W/40W USA

6006/6.2V/50W/40W USA

6006 AC/DELCO

6006 GENERAL-ELECTRIC

6006 MICROLAMP

6006 NORMAN


6006 USA

15594-1 MILITARY-STANDARD




22065-7

646770U MICROLAMP




5956006 GENERAL-MOTORS

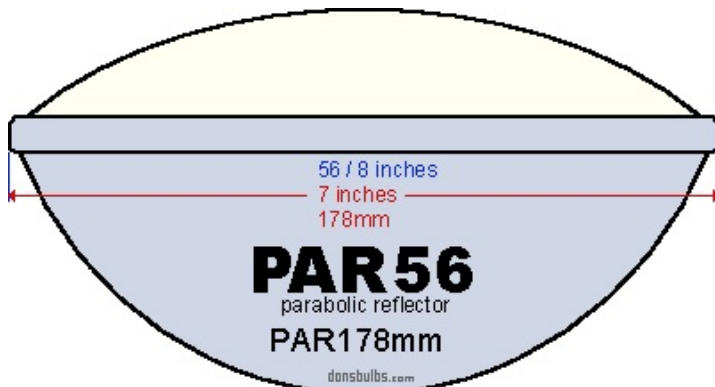

typical shape of **PAR56** glass envelopes
(not to scale)

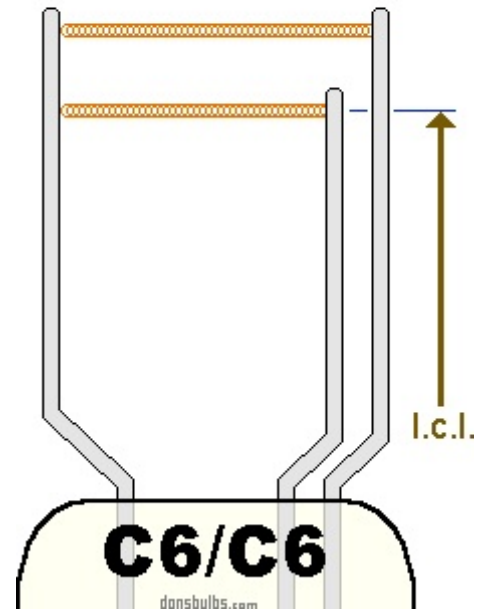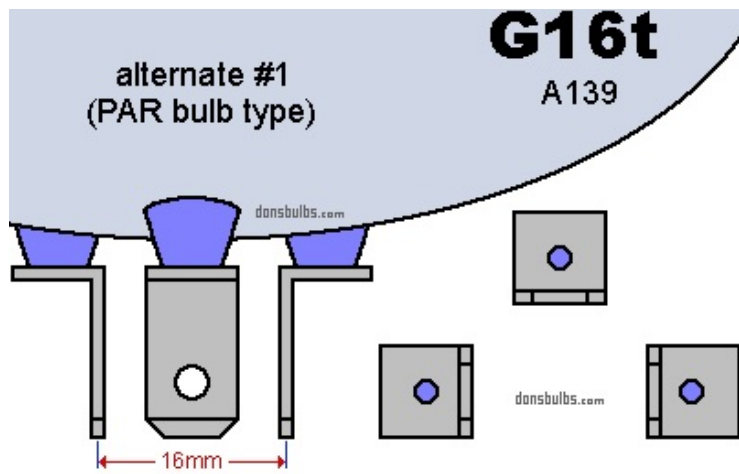

typical shape of C6/C6 filament
(not to scale)

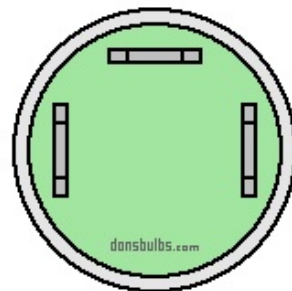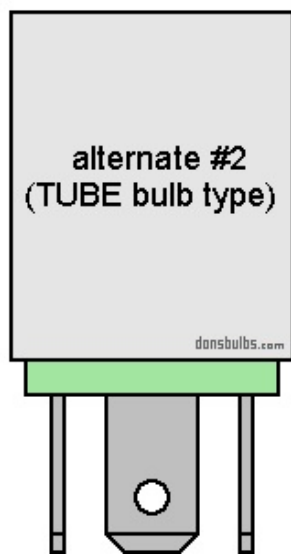

industry standards for base: G16t
(not to scale)



typical photo of 6006 6.1V 6.2V 50W 40W USA bulb type
(your bulb may look slightly different)